




PLAN VIEW

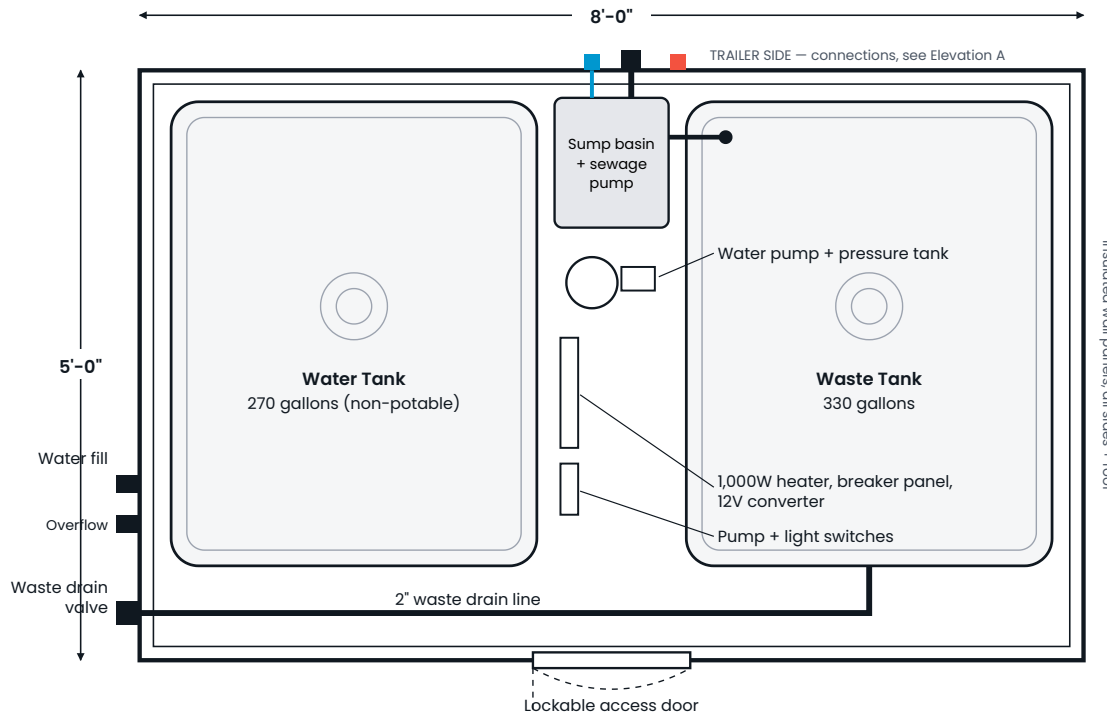

ELEVATION A — TRAILER SIDE

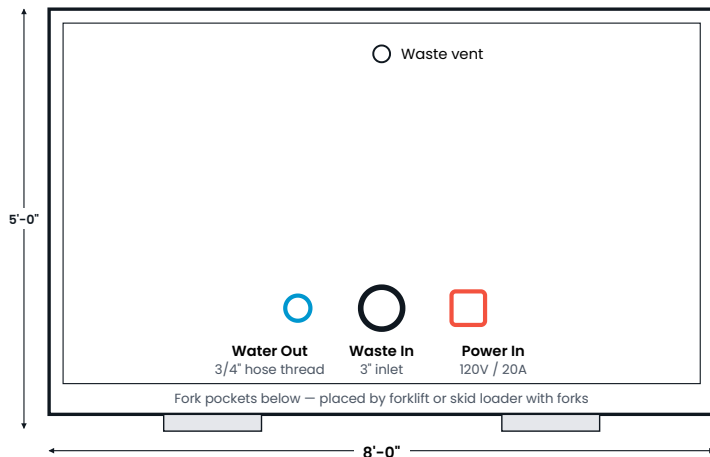

ELEVATION B — SERVICE END

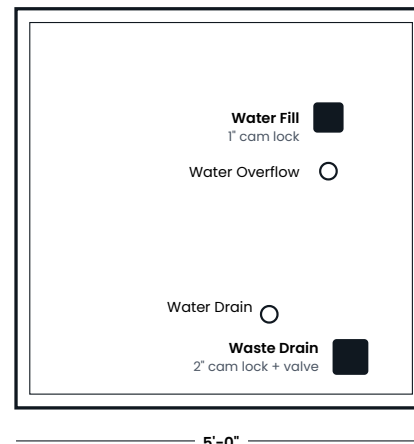

Complete Box

Water & Waste Box — fully self-contained water and waste system for office trailers

SKU	WW600
Dimensions	8'-0" L x 5'-0" W x 5'-0" H
Empty weight	Approx. 1,000 lbs
Fresh water	270 gallons usable. Non-potable — for sinks and toilets
Waste holding	330 gallons, sealed and vented
Enclosure	Insulated wall and roof panels, fully enclosed, lockable door
Heat	1,000W electric heater inside the box, on its own 20A breaker
Water system	12V water pump with pressure tank and inlet strainer
Waste system	Sewage pump in sump basin with check valve; high-level alarms
Site power	One dedicated 120V / 20A circuit (30A twist-lock inlet on box, adapter cord included)
Water Out	3/4" garden hose thread — heated hose to trailer
Waste In	3" inlet from trailer drain, sloped 1/4" per foot
Service ports	1" cam lock water fill with overflow; 2" cam lock waste drain with valve — same end of box
Handling	Fork pockets. No axles, wheels, or hitch. Move empty
Site needs	Level, firm 8' x 5' spot beside the trailer; forklift or skid loader with forks; clear lane for the service truck
Service	Water refilled and waste pumped on a weekly route
Revised	9.17.26

Schematic. Interior component locations are representative and not to scale. Also available: Water Box (660 gal fresh) and Waste Box (660 gal waste), same 8' x 5' x 5' footprint.

(844) 900-3190 • info@stahlaservices.com

sitetrailer.com/water-waste-support/how-it-works